


Technical strips

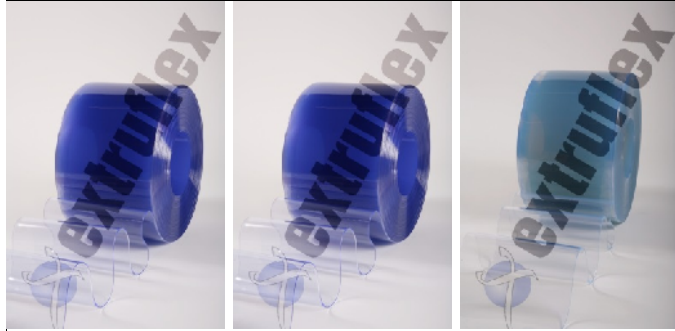


Antistatic

Antibacterial

Fire retardant

สนใจสินค้า และ บริการ ติดต่อฝ่ายขายได้ที่
บริษัท กรุงเทพ เครื่องเย็น เซลส์ แอนด์ เซอร์วิส จำกัด

 **091-715-9373 hotline**

โทร: 02-923-8561-3

แฟกซ์: 02-923-8564-5

อีเมล: bkkcooling_88@hotmail.co.th

TECHNICAL SPECIFICATIONS

PROPERTY	Standard	Unit	Value
Shore A hardness	EN ISO 868	Sh A	85
Tearing resistance	DIN 53515	N/mm	50/65
Tensile strength at break	ASTM D 638 EN ISO 527	N/mm ²	16
Elongation at break		%	340/280
Residual elong. (after break)		%	68/60
Thermal conductivity	ASTM C 177	W/m.K	0,16
Cold bend brittle temperature	ISO 8570	°C	-35/-20
Usage temperature range	EN 1876	°C	-15/0/+50
Vicat softening temperature	EN ISO 306	°C	50
Specific heat capacity	ISO 11357	kJ/kg.K	1,6
Sound reduction	DIN 52210	dB	>35
Reaction to fire	EN 13501-1:2007		/B-s3,d0
Light transmittance	ASTM D 1003	%	85
UV/IR filter	EN 1598	Filter	-
UV resistance	ISO4892	-	Yes
Charge buildup	IEC 61087	Sparks	No/Yes
Surface resistivity	IEC 60093	.1012 /	2/40
Water absorption	EN ISO 62	%	1 to 1.6/-0,2
Density	ASTM D 792	g/cm ³	1,22/1.33

The data contained in this technical specification is given for information only and is based on our current knowledge of the products concerned.

This information given to our customer in good faith to inform him and to help him in his search, does not constitute any formal or implicit guarantees as to its use.

Extruflex reserves the right to modify this Product data sheet or its product at any time without prior notice.

Specifications

TOLERANCES

Thickness: +0 / -0,3 mm

Width: +0 / -4 mm

Length: 50 m